



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
02.01.2004 Bulletin 2004/01

(51) Int Cl.7: **H03K 3/57**

(21) Application number: **03253708.6**

(22) Date of filing: **11.06.2003**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT RO SE SI SK TR
Designated Extension States:
AL LT LV MK

(30) Priority: **12.06.2002 JP 2002171684**
03.03.2003 JP 2003056308

(71) Applicant: **NGK INSULATORS, LTD.**
Nagoya-City Aichi 467-8530 (JP)

(72) Inventors:
• **Hatano, Tatsuhiko,**
c/o I.P.D. NGK Insulators, Ltd.
Nagoya City, Aichi-ken, 467-8530 (JP)
• **Sakuma, Takeshi, c/o I.P.D. NGK Insulators, Ltd.**
Nagoya City, Aichi-ken, 467-8530 (JP)
• **Iida, Katsuji**
Atsugi City, Kanagawa Pref.243-0037 (JP)

(74) Representative: **Paget, Hugh Charles Edward et al**
MEWBURN ELLIS
York House
23 Kingsway
London WC2B 6HP (GB)

(54) **High-voltage pulse generating circuit**

(57) A high-voltage pulse generating circuit (10A) has an inductor (32), a first semiconductor switch (34), and a second semiconductor switch (14) which are connected in series between opposite terminals of a DC power supply unit (12), and a diode (36) having a cathode terminal connected to a terminal (42) of the inductor (32) which has another terminal connected to an anode terminal (A) of the first semiconductor switch (34), and an anode terminal connected to a gate terminal of the

first semiconductor switch (34). The inductor (32) stores an induction energy when the first semiconductor switch (34) is rendered conductive by a turn-on of the second semiconductor switch (14), and generates a high-voltage pulse when the first semiconductor switch (34) is turned off by a turn-off of the second semiconductor switch (14).

Description

BACKGROUND OF THE INVENTION

Field of the Invention:

[0001] The present invention relates to a high-voltage pulse generating circuit of a simple arrangement for supplying a high-voltage pulse having an extremely short rise time and an extremely short pulse duration by releasing electromagnetic energy which has been stored in an inductor from a low-voltage DC power supply unit.

Description of the Related Art:

[0002] There has recently been proposed a technology for generating a plasma by discharging a high-voltage pulse to perform deodorization, sterilization and also to decompose toxic gases. Generating such a plasma requires a high-voltage pulse generating circuit which is capable of generating a pulse having a high voltage and an extremely short pulse duration.

[0003] As shown in FIG. 15 of the accompanying drawings, a conventional high-voltage pulse generating circuit 100 comprises a capacitor charger 102, a capacitor 104, a switch 108, and a load 110 (see Japanese laid-open patent publication No. 2002-44965, for example).

[0004] The capacitor charger 102 generates a high DC voltage which is substantially equal to the peak value of a high-voltage pulse. The capacitor 104 is charged by the capacitor charger 102 to a voltage which is substantially equal to the high DC voltage generated by the capacitor charger 102. In order for the switch 108 to have a large withstand voltage, the switch 108 comprises a plurality of semiconductor devices 106 such as SI (Static Induction) thyristors or the like which are connected in series. The load 110 is supplied with a high-voltage pulse by high-speed switching operation of the switch 108 under the high DC voltage charged in the capacitor 104.

[0005] The switch 108 has a plurality of gate drive circuits 112 connected to the respective semiconductor devices 106 to turn on the semiconductor devices 106, and a plurality of balancing resistors 114 connected parallel to the respective semiconductor devices 106. The balancing resistors 114 serve to reduce any unbalances between the voltages applied across the respective semiconductor devices 106 due to impedance variations caused when the semiconductor devices 106 are rendered nonconductive.

[0006] Specifically, the high-voltage pulse generating circuit 100 has a multiple-series-connected circuit 116 of semiconductor devices 106 and balancing resistors 114 which are connected in series to the load 110.

[0007] FIG. 16 of the accompanying drawings shows a proposed high-voltage pulse generating circuit 118. In the proposed high-voltage pulse generating circuit 118,

when a semiconductor switch 126 is turned on, a current flows from a DC power supply 120 (having a power supply voltage E) to a resistor 136 (having a resistance R) to the one-turn primary windings of respective magnetizable cores 128 to the semiconductor switch 126 to the DC power supply 120, the current having a magnitude represented substantially by E/R .

[0008] At this time, because of the magnetizable cores 128 operating as a transformer, the same current flows through the one-turn secondary windings of respective magnetizable cores 128 via the gates and cathodes of semiconductor devices 134. Therefore, all the semiconductor devices 134 are simultaneously turned on (see, for example, The Institute of Electrical Engineers of Japan, Plasma Science and Technology, Lecture No. PST-02-16).

[0009] The semiconductor devices 134 connected in series, and the semiconductor switch 126 are rendered conductive, a voltage which is substantially the same as the power supply voltage E is applied to an inductor 138. As a result, a current I_L flowing through the inductor 138 increases linearly, storing electromagnetic energy in the inductor 138.

[0010] The current I_L flowing through the inductor 138 increases until electromagnetic energy is stored up to a desired level in the inductor 138. When the semiconductor switch 126 is turned off, since the path of the current I_L flowing through the inductor 138 is cut off, an induced voltage of opposite polarity is generated due to the stored electromagnetic energy in the inductor 138.

[0011] As a consequence, the diode 140 is rendered conductive, allowing a current to flow continuously from the inductor 138 to the semiconductor devices 134, the primary windings of the respective magnetizable cores 128 to the diode 140 to the inductor 138. At this time, a current of the same magnitude also flows through the secondary windings of the magnetizable cores 128.

[0012] Thus, the current flowing into the anodes of the semiconductor devices 134 flows entirely into the gates thereof, with no current flowing to the cathodes thereof. The current flows until the electric charges stored in the semiconductor devices 134 are discharged. Since no large voltage drop is caused in the current path and this state merely continues for an extremely short period of time, any reduction in the current I_L flowing through the inductor 138 is small, and any reduction in the stored electromagnetic energy in the inductor 138 is also small.

[0013] As the electric charges stored in the semiconductor devices 134 are discharged, the semiconductor devices 134 are turned off, with a depletion layer being quickly developed therein. Since the inductor current is charged with a small electric capacity, the voltage between the anode and cathode of each of the semiconductor devices 134 rises sharply. Therefore, the voltage across the inductor 138 increases quickly, and the current I_L flowing through the inductor 138 decreases quickly. Stated otherwise, the electromagnetic energy in the inductor 138 is shifted into an electrostatic energy

in the capacitance between the anode and cathode of each of the semiconductor devices 134. Since the voltage across the inductor 138 is also applied to a load 142 connected across the inductor 138, the electromagnetic energy in the inductor 138 and the electrostatic energy in the capacitance between the anode and cathode of each of the semiconductor devices 134 are consumed by the load 142 while the electromagnetic energy is being shifted into the electrostatic energy.

[0014] With the high-voltage pulse generating circuit 118, the DC power supply 120 may generate a low voltage and the semiconductor devices 134 may be turned on and off only by currents flowing through the secondary windings of the magnetizable cores 128. Consequently, the high-voltage pulse generating circuit 118 requires no gate drive circuits and is relatively simple.

[0015] However, the conventional high-voltage pulse generating circuit 100 shown in FIG. 15 has a complex circuit arrangement. A high voltage is applied to all the circuit components including the capacitor charger 102. The circuit components need to be insulated against each other, e.g., need to be spaced from each other by a large distance. Therefore, the conventional high-voltage pulse generating circuit 100 tends to be large in size and high in cost.

[0016] If only some of the series-connected semiconductor devices 106 are turned on due to malfunctions, then the remaining semiconductor devices 106 may be damaged by an overvoltage in excess of a rated voltage applied thereto. Accordingly, the operation of the conventional high-voltage pulse generating circuit 100 is not reliable.

[0017] Furthermore, for the conventional high-voltage pulse generating circuit 100 to generate a pulse which rises extremely sharply, e.g., at 10 kV/ μ sec or above, it is necessary that each of the semiconductor devices 106 be turned on quickly. Consequently, even if gate signals are applied to the semiconductor devices 106 at timings differing merely by 2 nsec or 3 nsec, or semiconductor devices 106 are turned on at timings differing merely by 2 nsec or 3 nsec, generated transient voltages are liable to be out of balance. The conventional high-voltage pulse generating circuit 100 thus suffers much greater difficulty than a series-connected array of semiconductor devices in an ordinary inverter for generating a pulse at several hundreds V/ μ sec.

[0018] With the proposed high-voltage pulse generating circuit 118 shown in FIG. 16, however, the DC power supply 120 may generate a low voltage, and a voltage in excess of the withstand voltage is never be applied to the semiconductor devices 134 even if some are turned off due to malfunctions. However, the timings of the turning off of the semiconductor devices 134 differ, making it highly difficult to prevent transient voltages from being brought out of balance when the semiconductor devices 134 are turned off quickly. Therefore, the proposed high-voltage pulse generating circuit 118 also suffers the same problems of series-connected semi-

conductor devices.

[0019] In the high-voltage pulse generating circuit 118, the magnetizable cores 128 are connected in series to the diode 140. As a consequence, inductances exist due to the physical distance in which the magnetizable cores are provided and also due to leakages between the finite primary and secondary windings. Because of these inductances, it takes time for the inductor current, which flows when the semiconductor switch 126 is turned off, to be commutated to the diode 140. Therefore, the rate at which the gate currents for turning off the semiconductor devices 134 increase is suppressed, and the depletion layer starts spreading (the turn-off gain becomes 1 or more) while currents are flowing into the cathodes of the semiconductor devices 134, making the high-voltage pulse generating circuit 118 unstable when the semiconductor devices 134 are turned off sharply.

20 SUMMARY OF THE INVENTION

[0020] It is therefore an object of the present invention to provide a high-voltage pulse generating circuit which is of a simple arrangement free of a plurality of semiconductor switches to which a high voltage is applied, and is capable of supplying a high-voltage pulse having an extremely short rise time and an extremely short pulse duration.

[0021] A high-voltage pulse generating circuit according to the present invention has an inductor, a first semiconductor switch, which preferably has as high a voltage rating as possible, and a second semiconductor switch, which may have a voltage rating as low as a DC power supply voltage, connected in series between opposite terminals of a DC power supply unit. A diode has a cathode terminal connected to a terminal of the inductor whose other terminal is connected to an anode terminal of the first semiconductor switch, and an anode terminal connected to a control (gate) terminal of the first semiconductor switch. The high-voltage pulse generating circuit thus has a highly simple arrangement.

[0022] When the second semiconductor switch is turned on, the first semiconductor switch is rendered conductive, applying the voltage of the DC power supply unit to the inductor, which stores an induction energy therein. When the second semiconductor switch is subsequently turned off, the first semiconductor switch is also turned off quickly. Therefore, the inductor generates a high-voltage pulse having an extremely short rise time and an extremely short pulse duration.

[0023] A load which is supplied with the high-voltage pulse from the inductor may be connected parallel to the inductor or parallel to the first semiconductor switch.

[0024] According to the present invention, the inductor may comprise a primary winding and a secondary winding magnetically coupled to each other. Since a voltage which is substantially the same as the voltage generated by the inductor is applied to the first semi-

ductor switch, the voltage generated by the inductor cannot be set to a level equal to or higher than the withstand voltage of the first semiconductor switch.

[0025] If the high-voltage pulse generating circuit is required to produce an output voltage higher than the withstand voltage of the first semiconductor switch, then the secondary winding may have a greater number of turns than the primary winding to generate a high-voltage pulse across the secondary winding of the inductor, which has a voltage higher than the withstand voltage of the first semiconductor switch.

[0026] The inductor may comprise a primary winding and a secondary winding connected to a primary winding without insulating a DC signal. The secondary winding may be connected to a primary winding without insulating a DC signal, but connected to the primary winding in additive polarity, for outputting a high-voltage pulse having a voltage which is the sum of voltages generated across the primary and secondary windings.

[0027] If the inductor is constructed of the primary and secondary windings, the inductor should preferably have a magnetizable core to provide a close magnetic coupling between the primary and secondary windings and suppress a magnetic flux leakage therefrom.

[0028] Devices which can be used as the first semiconductor switch will be described below. The first semiconductor switch may comprise a device controlled based on current or a self-extinguishing or commutation-turn-off device. Specifically, the first semiconductor switch may comprise an SI thyristor, a GTO (Gate-Turn-Off) thyristor, an SIT (Static Induction Transistor), a bipolar transistor, a thyristor, or the like. Of these devices, a current-controlled, self-extinguishing thyristor such as a GTO is preferable. Particularly, if a device having high turn-on and turn-off speeds is required for generating a short-duration pulse, then an SI thyristor is preferable for use as the first semiconductor switch. The SI thyristor can be turned on due to a field effect only by applying a slight positive voltage between the gate and cathode thereof if the current rise rate at the time it is turned on is relatively small.

[0029] When the first semiconductor switch is to be turned off, a current is drawn from the gate thereof to eliminate electric charges stored in the first semiconductor switch, developing a depletion layer therein to completely turn off the first semiconductor switch. If the high-voltage pulse generating circuit is used in an ordinary inverter or the like, then a turn-off of the first semiconductor switch can be achieved when the drawing of the current from the gate is completed even if the turn-off gain is equal to or greater than 1, i.e., even if the gate current is smaller than the anode current and does not have a high increase rate.

[0030] If a sharp turn-off needs to be achieved such as in a pulse power application, then it is necessary to make the turn-off gate current equal to the anode current (the turn-off gain is 1) or greater than the anode current (the turn-off gain is less than 1) and quickly increase the

turn-off gate current, and to achieve an ideal stable turn-off to eliminate the cathode current before the drawing of the electric charges stored in the first semiconductor switch is completed.

[0031] However, since the anode current is usually high, it is very difficult and not practical for an ordinary gate drive circuit to supply such current from the gate in order to make the turn-off gain equal to or less than 1 and to turn off the first semiconductor switch sharply (in a time of ten and several nsec. until the gate current is equalized to the anode current).

[0032] The high-voltage pulse generating circuit according to the present invention has a function to make the turn-off gain equal to or less than 1 apparently without the need for such a gate drive circuit.

[0033] The second semiconductor switch may comprise a self-extinguishing or commutation-turn-off device. For example, the second semiconductor switch may comprise a power metal-oxide semiconductor field-effect transistor.

[0034] The high-voltage pulse generating circuit may further comprise a circuit component connected to regenerate remaining energy in the inductor in the DC power supply unit after the second semiconductor switch is turned off.

[0035] The above circuit component may comprise a diode connected parallel to the first semiconductor switch and having a cathode terminal connected to the anode terminal of the first semiconductor switch. Alternatively, the circuit component may comprise a diode having an anode terminal connected between the DC power supply unit and the second semiconductor switch, and a cathode terminal connected to the other terminal of the inductor.

[0036] With the above arrangement, if any energy remains in the inductor, e.g., if a load is connected to the inductor, then excessive energy (unused energy) from the load is returned to the DC power supply unit, contributing to a higher efficiency of operation of the DC power supply unit.

[0037] The high-voltage pulse generating circuit may further comprise a path for commutating a current flowing through the first semiconductor switch after the second semiconductor switch is turned off. The path may be connected parallel to the first semiconductor switch.

[0038] The path may have a capacitor connected between the anode and cathode terminals of the first semiconductor switch. Alternatively, the path may have a capacitor connected between the gate and anode terminals of the first semiconductor switch. The path with the capacitor reduces the operational burden of the first semiconductor switch. The path with the capacitor is effective to reduce the switching loss caused by the first semiconductor switch and to increase the current cutoff resistance of the first semiconductor switch.

[0039] When the first semiconductor switch cuts off a current at a high speed or cuts off a large current, a large surge voltage is applied to the excited inductance of the

inductor and the first semiconductor switch. However, the above path is effective to reduce the surge voltage for thereby increasing the reliability of the first semiconductor switch.

[0040] The first semiconductor switch which is used may not have a high voltage rise rate (dv/dt) at the time it is turned off. The above path with the capacitor is effective to adjust the voltage rise rate (dv/dt) of the first semiconductor switch to an allowable level with the capacitance of the capacitor.

[0041] Since much of the energy remaining in the capacitor thus connected is regenerated in the DC power supply unit, any reduction in the efficiency which is caused by the capacitor is small.

[0042] If a load is connected to the inductor, then a capacitor may be connected parallel to the load. The capacitor thus connected makes it easy for the excited inductance of the inductor to commutate a current to the load after the first semiconductor switch cuts off the current. As with the path described above, the capacitor thus connected is also effective to reduce the switching loss caused by the first semiconductor switch and increase the current cutoff resistance of the first semiconductor switch. The capacitor connected parallel to the load can absorb the energy stored in the excited inductance of the inductor, thus suppressing the surge voltage on the excited inductance. Because much of the energy remaining in the capacitor thus connected is also regenerated in the DC power supply unit, any reduction in the efficiency which is caused by the capacitor is small.

[0043] According to the present invention, another high-voltage pulse generating circuit comprises a DC power supply unit having opposite terminals, an inductor, a first semiconductor switch, and a second semiconductor switch which are connected in series between the opposite terminals of the DC power supply unit, and a resistor connected between a terminal of the inductor which has another terminal connected to an anode terminal of the first semiconductor switch, and a gate terminal connected to a gate terminal of the first semiconductor switch.

[0044] With the above arrangement, when the second semiconductor switch is turned on, the first semiconductor switch is reliably turned on. If the first semiconductor switch comprises is controlled based on current, then it is not turned on unless a current is introduced into the gate thereof. The resistor connected as described above is effective in reliably turning on the first semiconductor switch.

[0045] Use of the resistor makes the high-voltage pulse generating circuit relatively low in cost even if the DC power supply unit is constructed to produce a high power supply voltage.

[0046] The above and other objects, features, and advantages of the present invention will become more apparent from the following description when taken in conjunction with the accompanying drawings in which preferred embodiments of the present invention are shown

by way of illustrative example.

BRIEF DESCRIPTION OF THE DRAWINGS

[0047]

FIG. 1 is a circuit diagram of a high-voltage pulse generating circuit according to a first embodiment of the present invention;

FIGS. 2A through 2E are waveform diagrams showing the waveforms of voltages and currents in the high-voltage pulse generating circuit according to the first embodiment;

FIG. 3 is a circuit diagram of a high-voltage pulse generating circuit according to a second embodiment of the present invention;

FIG. 4 is a circuit diagram of a high-voltage pulse generating circuit according to a third embodiment of the present invention;

FIG. 5 is a circuit diagram of a high-voltage pulse generating circuit according to a fourth embodiment of the present invention;

FIG. 6 is a circuit diagram of the high-voltage pulse generating circuit according to the fourth embodiment, the view showing the manner in which a current flowing through the excited inductance of an inductor flows to a load through the inductor;

FIG. 7 is a circuit diagram of the high-voltage pulse generating circuit according to the fourth embodiment, the view showing the manner in which energy is regenerated;

FIG. 8 is a circuit diagram of a high-voltage pulse generating circuit according to a fifth embodiment of the present invention;

FIG. 9 is a circuit diagram of a high-voltage pulse generating circuit according to a sixth embodiment of the present invention;

FIG. 10 is a circuit diagram of a high-voltage pulse generating circuit according to a seventh embodiment of the present invention;

FIG. 11 is a circuit diagram showing the manner in which a current flowing through a first semiconductor switch flows to a capacitor;

FIG. 12A is a diagram showing how the voltage between the anode and cathode of the first semiconductor switch differs when a capacitor is not connected and when a capacitor is connected;

FIG. 12B is a diagram showing how a switching loss differs;

FIG. 13 is a circuit diagram of a high-voltage pulse generating circuit according to an eighth embodiment of the present invention;

FIG. 14 is a circuit diagram of a high-voltage pulse generating circuit according to a ninth embodiment of the present invention;

FIG. 15 is a circuit diagram of a conventional high-voltage pulse generating circuit; and

FIG. 16 is a circuit diagram of a proposed high-volt-

age pulse generating circuit.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0048] High-voltage pulse generating circuits according to various embodiments of the present invention will be described below with reference to FIGS. 1 through 14. Similar or corresponding parts are denoted by similar or corresponding reference characters throughout views.

[0049] As shown in FIG. 1, a high-voltage pulse generating circuit 10A according to a first embodiment of the present invention has an inductor 32, a first semiconductor switch 34, and a second semiconductor switch 14 which are connected in series between positive and negative terminals 46, 48 of a DC power supply unit 12. The DC power supply unit 12 comprises a DC power supply 22 for generating a DC power supply voltage E and a capacitor 24 for lowering a highfrequency impedance. The inductor 32 has a terminal 44 connected to an anode terminal A of the first semiconductor switch 34 and another terminal 42 connected to a control terminal (gate terminal) G of the first semiconductor switch 34 through a diode 36. The diode 36 has an anode connected to the control terminal G of the first semiconductor switch 34. A load 20 to which a high-voltage pulse will be applied is connected parallel to the inductor 32.

[0050] In the embodiment shown in FIG. 1, the second semiconductor switch 14 is connected to the negative terminal 48 of the DC power supply unit 12. However, the second semiconductor switch 14 may alternatively be connected to the positive terminal 46 of the DC power supply unit 12. Although the load 20 is connected parallel to the inductor 32 in FIG. 1, the load 20 may be connected parallel to the first semiconductor switch 34.

[0051] The second semiconductor switch 14 may comprise a self-extinguishing or commutation-turn-off device. In the first embodiment, the second semiconductor switch 14 comprises a power metal-oxide semiconductor field-effect transistor (power MOSFET) 26 with an avalanche diode 30 in inverse-parallel connection. The second semiconductor switch 14 also has a gate drive circuit 28 connected to a gate terminal G and a source terminal S of the power MOSFET 26 for controlling the turning on and off of the power MOSFET 26.

[0052] The first semiconductor switch 34 may comprise a device controlled by current, or a self-extinguishing or commutation-turn-off device. In the first embodiment, the first semiconductor switch 34 comprises an Si thyristor having a very large resistance with respect to a voltage rise rate (dv/dt) at the time it is turned off and also having a high voltage rating.

[0053] Operation of the high-voltage pulse generating circuit 10A according to the first embodiment will be described below primarily in a chronological sequence for supplying a high-voltage pulse V_L to the load 20 with

reference to the circuit diagram shown in FIG. 1 and waveform diagrams shown in FIGS. 2A through 2E.

[0054] At time t_0 , the gate drive circuit 28 supplies a control signal V_c (see FIG. 2E) between the gate and source of the power MOSFET 26, which is turned on from an off state.

[0055] At this time, because of a very large impedance provided in opposite polarity by the diode 36, the first semiconductor switch 34 is turned on due to a field effect by applying a positive voltage between the gate G and cathode K thereof (see FIG. 2D). Since an anode current of the first semiconductor switch 34 is prevented from rising by the inductor 32, the first semiconductor switch 34 is normally turned on only due to the field effect. Alternatively, a resistor may be connected parallel to the diode 36 or a resistor may be connected from another power supply to the gate of the first semiconductor switch 34, and a large gate current may be supplied to the gate terminal G of the first semiconductor switch 34 through such a resistor.

[0056] When the second semiconductor switch 14 and the first semiconductor switch 34 are thus rendered conductive at time t_0 , a voltage, which is substantially the same as the DC power supply voltage E, is applied to the inductor 32. If the inductance of the inductor 32 is represented by L, then as shown in FIG. 2A, a current I_L flowing through the inductor 32 increases linearly with time at a gradient represented by E/L .

[0057] When the current I_L reaches a level $I_p (= ET_0/L)$ at time t_1 , storing a desired amount of electromagnetic energy ($= LI_p^2/2$) in the inductor 32, the gate drive circuit 28 stops supplying the control signal, turning off the power MOSFET 26 (see FIG. 2E).

[0058] At this time, if a floating inductance (mainly a wiring inductance), not shown, other than the inductance of the inductor 32, in the path of the current I_L is large, then the power MOSFET 26 is not cut off instantaneously. Specifically, the current continues to flow in a slight period of time, and the output capacitance of the power MOSFET 26 is charged up to the avalanche voltage of the diode 30, whereupon the diode 30 is rendered conductive under the avalanche voltage and hence suffers serious damage. To avoid the above drawback, the floating inductance is minimized to allow the power MOSFET 26 to be turned off ideally without causing avalanche across the diode 30.

[0059] When the power MOSFET 26 is turned off, the current from the cathode K of the first semiconductor switch 34 is eliminated, i.e., the first semiconductor switch 34 is opened. Therefore, the current I_L flowing through the inductor 32 is cut off, and the inductor 32 tends to generate a reverse induced voltage V_L due to the remaining electromagnetic energy stored therein. At this time, however, the diode 36 operates to commutate the current I_L flowing through the inductor 32 to the path from the anode terminal A of the first semiconductor switch 34 to the gate terminal G of the first semiconductor switch 34 to the anode of the diode 36 to the cathode

of the diode 36.

[0060] It is necessary that any floating inductance of a branch circuit including the diode 36 be as small as possible to finish the commutate of the current within a short period of time. Since the first semiconductor switch 34 has stored electric charges due to the current which has already flowed, and the first semiconductor switch 34 remains conductive between the anode and gate thereof until the stored electric charge becomes nil (a storage period), any voltage drop across the above path is small.

[0061] Therefore, the reverse induced voltage V_L across the inductor 32 is suppressed to a sufficiently low value, and hence there is almost no reduction in the current I_L in the short storage period (i.e., a period T_1 in FIG. 2A). The period T_1 is determined depending on the amount of electric charges drawn from the gate terminal G of the first semiconductor switch 34. It is thus required to sharply pass as large a current as possible (which cannot be larger than the anode current in the first embodiment) to set an apparent turn-off gain to 1 or less for thereby shortening the period T_1 to minimize any reduction in the current I_L through the inductor 32.

[0062] At time t_2 , the electric charges are completely drawn from the first semiconductor switch 34, and a depletion layer in the first semiconductor switch 34 spreads from the gate and the cathode toward the anode, starting to turn off the first semiconductor switch 34. Because the depletion layer depends on a potential developed in the first semiconductor switch 34, the depletion layer spreads as the voltage applied to the junction increases and the turn-off process progresses, and finally reaches a position near the anode.

[0063] Therefore, the electric capacitance of the depletion layer changes from a saturated state (conductive state) where many active electric charges are present, to a small electric capacitance which is structurally determined. The current based on the electromagnetic energy stored in the inductor 32 continuously flows from the anode to the gate of the first semiconductor switch 34, thus charging the electric capacitance of the depletion layer. The voltage for charging the electric capacitance, i.e., the anode-to-gate voltage V_{AG} of the first semiconductor switch 34 initially increases relatively gradually due to the large electric capacitance, but then increases quickly as the depletion layer spreads.

[0064] When the current I_L becomes nil at time t_3 , the voltage V_{AG} and the voltage V_L reach maximum levels V_{AP} , V_{LP} , respectively, as shown in FIGS. 2B and 2C. At this time, the electromagnetic energy stored in the inductor 32 has entirely been shifted into the electric capacitance of the depletion layer in the first semiconductor switch 34.

[0065] This phenomenon is a resonant action based on the inductance of the inductor 32 and the electric capacitance of the first semiconductor switch 34. Consequently, the current I_L flowing through the inductor 32 is essentially of a cosine waveform, and the anode-to-gate

voltage V_{AG} of the first semiconductor switch 34 is essentially of a sine waveform.

[0066] By selecting the value of the inductance of the inductor 32 whose constants can freely be determined, the duration of a pulse generated across the inductor 32 and the load 20 connected parallel to the inductor 32 can be controlled. Specifically, if the electric capacitance of the first semiconductor switch 34 is represented by an equivalent capacitance C , then the pulse duration T_p is expressed by:

$$T_p \approx \pi \sqrt{LC}$$

[0067] The electric charges stored in the electric capacitance of the depletion layer in the first semiconductor switch 34, which has been charged to the maximum level V_{AP} at time t_3 , start to be discharged through a path from the inductor 32 to the diode 36 which has been rendered conductive reversely by the stored electric charges. The electric charges are continuously discharged for a period T_3 until the diode 36 recovers itself and becomes nonconductive at time t_4 . If any energy remains in the inductor 32 and the electric capacitance of the depletion layer in the first semiconductor switch 34 at time t_4 , then a current due to the remaining energy flows from the DC power supply unit 12 to the diode 30 of the second semiconductor switch 14 to the cathode K of the first semiconductor switch 34 to the anode A of the first semiconductor switch 34.

[0068] During a period T_4 in which the current flows in the DC power supply unit 12, the high-voltage pulse generating circuit 10A operates in a regenerative mode. In the regenerative mode, the energy which remains in the inductor 32 and the electric capacitance of the depletion layer in the first semiconductor switch 34 is regenerated and contributes to an increase in the operating efficiency of the high-voltage pulse generating circuit 10A. Therefore, it is important to reduce the time required to recover the diode 36, i.e., the period T_3 , as much as possible.

[0069] In the first embodiment, the load 20 comprises a linear load which may be a equivalent resistive load. If the load 20 comprises a nonlinear load such as a discharging gap 50 as shown in FIG. 5, then the load impedance is quickly reduced while the voltage is increases, and subsequent waveforms are different from those shown in FIGS. 2B and 2C, i.e., subsequent waveforms are pulse-like waveforms whose pulse durations are shorter than those shown in FIGS. 2B and 2C.

[0070] In the high-voltage pulse generating circuit 10A according to the first embodiment shown in FIG. 1, the anode-to-gate voltage V_{AG} of the first semiconductor switch 34 is substantially the same as the voltage across the inductor 32. Therefore, a voltage which is equal to or higher than the resistance against the anode-to-gate voltage V_{AG} of the first semiconductor switch 34 cannot be outputted as a pulse from the inductor 32.

[0071] FIGS. 3 and 4 show high-voltage pulse generating circuits 10B, 10C according to second and third embodiments of the present invention. The high-voltage pulse generating circuits 10B, 10C are suitable for outputting a voltage which is equal to or higher than the resistance against the anode-to-gate voltage V_{AG} of the first semiconductor switch 34.

[0072] As shown in FIG. 3, the high-voltage pulse generating circuit 10B according to the second embodiment is substantially the same as the high-voltage pulse generating circuit 10A according to the first embodiment, but differs in that the inductor 32 comprises a primary winding 33 and a secondary winding 38 magnetically coupled to the primary winding 33 and having a greater number of turns than the primary winding 33.

[0073] As shown in FIG. 4, the high-voltage pulse generating circuit 10C according to the third embodiment is substantially the same as the high-voltage pulse generating circuit 10A according to the first embodiment, but differs in that the inductor 32 comprises a primary winding 33 and a secondary winding 38 connected to the primary winding 33 without insulating a DC signal, but connected to the primary winding 33 in additive polarity.

[0074] In the second and third embodiments, the primary and secondary windings 33, 38 should preferably be wound around a magnetizable core to provide a close magnetic coupling therebetween and suppress a magnetic flux leakage therefrom.

[0075] If the number of turns of the primary winding 33 is represented by N_1 and the number of turns of the secondary winding 38 by N_2 , then the high-voltage pulse generating circuit 10B according to the second embodiment can output a voltage of $V_{AG} \times N_2/N_1$ to the output 20, and the high-voltage pulse generating circuit 10C according to the third embodiment can output a voltage of $V_{AG} \times (N_1 + N_2)/N_1$ to the output 20.

[0076] In the second embodiment, the number of turns of the secondary winding 38 is greater than the number of turns of the primary winding 33 such that the secondary winding 38 is of additive polarity. However, the number of turns of the secondary winding 38 may be smaller than the number of turns of the primary winding 33 such that the secondary winding 38 is of subtractive polarity.

[0077] In the third embodiment, the secondary winding 38 is not connected to the primary winding 33 without insulating a DC signal, but connected to the primary winding 33 in additive polarity. However, the secondary winding 38 may be wound as subtractive-polarity turns connected to the primary winding 33.

[0078] To connect the secondary winding 38 in subtractive polarity to the primary winding 33, the secondary winding 38 may be wound around a magnetizable core, for example, in a direction opposite to the direction in which the secondary winding 38 is wound in additive polarity. If the secondary winding 38 is wound in subtractive polarity, then the output terminals of the inductor 32

serve as positive and negative terminals, which are opposite to those of the inductor 32 where the secondary winding 38 is additionally wound in additive polarity to the primary winding 33. The inductor 32 whose secondary winding 38 is wound in subtractive polarity outputs a voltage of $V_{AG} \times (N_1 - N_2)/N_1$ to the output 20 whereas the inductor 32 whose secondary winding 38 is wound in additive polarity outputs a voltage of $V_{AG} \times (N_1 + N_2)/N_1$ to the output 20. The inductor 32 whose secondary winding 38 is wound in subtractive polarity is effective for use with a semiconductor switch made of a compound semiconductor or the like and having an ultrahigh withstand voltage.

[0079] A high-voltage pulse generating circuit 10D according to a fourth embodiment of the present invention will be described below with reference to FIGS. 5 through 7. The high-voltage pulse generating circuit 10D according to the fourth embodiment uses a discharging gap 50 as the load 20.

[0080] The high-voltage pulse generating circuit 10D according to the fourth embodiment is substantially the same as the high-voltage pulse generating circuit 10B (see FIG. 3) according to the second embodiment, but differs in that it has a diode 52 connected parallel to the first semiconductor switch 34. The diode 52 has anode and cathode terminals connected respectively to the cathode and anode terminals of the first semiconductor switch 34, and hence is in inverse-parallel connection to the first semiconductor switch 34.

[0081] In the embodiment shown in FIG. 5, two parallel-connected diodes 36a, 36b are used as the diode 36, which is connected between the terminal 42 of the inductor 32 and the gate terminal G of the first semiconductor switch 34. The diodes 36a, 36b are functionally identical to the diode 36 in the high-voltage pulse generating circuit 10A according to the first embodiment.

[0082] The high-voltage pulse generating circuit 10D according to the fourth embodiment operates as follows: When the power MOSFET 26 is turned on, a current flows through the excited inductance of the inductor 32 as indicated by a path 54 in FIG. 5, storing energy in the inductor 32. When the power MOSFET 26 is turned off, the current that has flowed from the anode terminal A to the cathode terminal K of the first semiconductor switch 34 is commutated from the anode terminal A to the gate terminal G. The electric charges remaining in the first semiconductor switch 34 are drawn from the gate of the first semiconductor switch 34, which is then turned off.

[0083] When the first semiconductor is turned off, as shown in FIG. 6, the current that has flowed through the excited inductance of the inductor 32 is commutated through the inductor 32 to the load 20. At this time, a large pulse voltage is generated across the inductor 32, producing an electric discharge across the gap 50 of the load 20.

[0084] Since a parasitic capacitive component exists in general semiconductor switches, including the first semiconductor switch 34, not all the commutated cur-

rent flows through the load 20, but some of the current flows to charge the parasitic capacitance of the first semiconductor switch 34.

[0085] If the load comprises a capacitive load such as the discharging gap 50, then the energy is consumed by an electric discharge. However, not all the energy may be consumed or no electric discharge may occur, and much energy remains stored.

[0086] The remaining electric charges are discharged through the excited inductance of the inductor 32, i.e., a current flows through the excited inductance of the inductor 32, so that energy is moved again into the excited inductance of the inductor 32.

[0087] When the electric charges stored in the load 20 are gone and the movement of energy into the excited inductance is finished, a current flow through two paths, i.e., first and second paths 60, 62.

[0088] The first path 60 is a path directed toward the load 20 again; and the second path 62 is a path interconnecting the DC power supply unit 12, the diode 30 arranged in inverse-parallel connection to the power MOSFET 26, and the diode 52 arranged in inverse-parallel connection to the first semiconductor switch 34.

[0089] The voltage generated by the inductor 32 is clamped by voltage generated by the DC power supply unit 12 and the two diodes 30, 52, and much of the current flows through the second path 62. The flow of the current through the second path 62 serves to regenerate energy in the capacitor 24 of the DC power supply unit 12 in FIG. 7.

[0090] Stated otherwise, excessive energy (unused energy) from the load is returned to the DC power supply unit 12, contributing to a higher efficiency of operation of the DC power supply unit 12.

[0091] If the diode 52 were not employed, then the excited inductance of the inductor 32 and the load 20 would resonate, possibly applying a reversed voltage in excess of the withstand voltage to the first semiconductor switch 34. At this time, the second semiconductor switch 14 would be adversely affected, e.g., would be caused to malfunction, by pulsed noise added to the applied voltage. Therefore, it is preferable to connect the diode 52 for the purpose of processing energy in the excited inductance.

[0092] In the high-voltage pulse generating circuit 10D according to the fourth embodiment, the diode 52 is connected in inverse-parallel connection to the first semiconductor switch 34. FIG. 8 shows a high-voltage pulse generating circuit 10E according to a fifth embodiment of the present invention, which has a diode 64 having an anode terminal connected to the negative terminal 48 of the DC power supply unit 12 and a cathode terminal connected to a terminal of the inductor 32.

[0093] A current flows through a path 66 interconnecting the DC power supply unit 12 and the diode 64, regenerating energy in the DC power supply unit 12. The high-voltage pulse generating circuit 10E according to the fifth embodiment is particularly advantageous in that

since only one diode, i.e., the diode 64, is connected to the path of the regenerating current, unlike the above embodiment shown in FIG. 5, any loss caused upon regeneration of energy is small, and the regeneration efficiency is increased because wiring of the path of the regenerating current can be shortened mechanically.

[0094] High-voltage pulse generating circuits 10F, 10G according to sixth and seventh embodiments of the present invention will be described below with reference to FIGS. 9 through 12B.

[0095] The high-voltage pulse generating circuit 10F according to the sixth embodiment is substantially the same as the high-voltage pulse generating circuit 10D (see FIG. 5) according to the fourth embodiment, but differs in that, as shown in FIG. 9, a capacitor 68 is connected parallel to the first semiconductor switch 34 between the anode and cathode terminals of the first semiconductor switch 34.

[0096] The high-voltage pulse generating circuit 10G according to the seventh embodiment is substantially the same as the high-voltage pulse generating circuit 10D (see FIG. 5) according to the fourth embodiment, but differs therefrom in that, as shown in FIG. 10, a capacitor 70 is connected parallel to the first semiconductor switch 34 between the anode and gate terminals of the first semiconductor switch 34.

[0097] The high-voltage pulse generating circuits 10F, 10G according to the sixth and seventh embodiments operate as follows: When the power MOSFET 26 is turned off, the current that has flowed from the anode terminal to the cathode terminal of the first semiconductor switch 34 is commutated from the anode terminal to the gate terminal thereof. The electric charges remaining in the first semiconductor switch 34 are drawn from the gate terminal, whereupon the first semiconductor switch 34 is shifted into a turn-off state. At this time, as shown in FIG. 11, a current I_A which has flowed through the first semiconductor switch 34 is commutated to a path 72 along the capacitor 68 (the sixth embodiment shown in FIG. 9) or a path 74 along the capacitor 70 (the seventh embodiment shown in FIG. 10), reducing the operational burden of the first semiconductor switch 34.

[0098] If the capacitor 68 or 70 were not connected, then, as shown in FIG. 12A, the anode current I_A , which has flowed through the first semiconductor switch 34, would be reduced as the power MOSFET 26 is turned off. As indicated by the broken-line curve A, an anode-to-cathode voltage V_{AK} of the first semiconductor switch 34 would sharply rise substantially at the same time that the power MOSFET 26 is turned off. The anode-to-cathode voltage V_{AK} would suffer overshooting (pulse distortion), resulting in an increased switching loss (voltage \times current) caused by the first semiconductor switch 34 as indicated by the broken-line curve C in FIG. 12B. With the capacitor 68 or 70 being connected, as indicated by the solid-line curve B in FIG. 12A, the anode-to-cathode voltage V_{AK} rises gradually. Therefore, the switching loss caused by the first semiconductor switch 34 is re-

duced, as indicated by the solid-line curve D in FIG. 12B.

[0099] Consequently, the connected capacitor 68 or 70 is effective to reduce the switching loss caused by the first semiconductor switch 34 and to increase the current cutoff resistance of the first semiconductor switch 34.

[0100] The increased current cutoff resistance leads to an increase in the capacity of the pulsed power supply. Specifically, since the energy stored in the excited inductance of the inductor 32 is determined by $1/2 \times (\text{the excited inductance}) \times (\text{the cutoff current of the first semiconductor switch 34})^2$, the cutoff current of the first semiconductor switch 34 greatly affects the output capacity of the power supply.

[0101] When the first semiconductor switch 34 cuts off a current at a high speed or cuts off a large current, a large surge voltage (pulsed output) is applied to the excited inductance of the inductor 32 and the first semiconductor switch 34. The surge voltage in excess of the voltage rating would adversely affect the first semiconductor switch 34 when applied to the first semiconductor switch 34. However, as described above, the connected capacitor 68 or 70 is effective to reduce the surge voltage for thereby increasing the reliability of the first semiconductor switch 34.

[0102] According to the type used, the first semiconductor switch 34 may not have a high voltage rise rate (dv/dt) at the time it is turned off. The capacitor 68 or 70 connected parallel to the first semiconductor switch 34 is effective to adjust the voltage rise rate (dv/dt) of the first semiconductor switch 34 to an allowable level, e.g., 1 kV/ μ sec, with the capacitance of the capacitor 68 or 70, thereby increasing number of designs for the high-voltage pulse generating circuits 10F, 10G.

[0103] Since much of the energy remaining in the capacitor 67 or 70 thus connected is regenerated in the DC power supply unit 12, any reduction in the efficiency which is caused by the capacitor 67 or 70 is small.

[0104] A high-voltage pulse generating circuit 10H according to an eighth embodiment of the present invention will be described below with reference to FIG. 13.

[0105] The high-voltage pulse generating circuit 10H according to the eighth embodiment is substantially the same as the high-voltage pulse generating circuit 10D (see FIG. 5) according to the fourth embodiment, but differs in that a capacitor 76 is connected parallel to the load 20.

[0106] The high-voltage pulse generating circuit 10H according to the eighth embodiment operates as follows: When the first semiconductor switch 34 is turned off, the current that has flowed through the excited inductance of the inductor 32 is commutated through the inductor 32 to the load 20. Since the capacitor 76 is connected parallel to the load 20, the current that has flowed through the excited inductance is easily commutated to the load after the first semiconductor switch 34 cuts off the current. As a result, as with the high-voltage pulse generating circuits 10F, 10G according to sixth and sev-

enth embodiments, the first semiconductor switch 34 is reduced in size, suffers a reduced switching loss, and has an increased current cutoff resistance, and the pulsed power supply has an increased capacity.

[0107] When the first semiconductor switch 34 cuts off a current at a high speed or cuts off a large current, a large surge voltage (pulsed output) is applied to the excited inductance of the inductor 32 and the first semiconductor switch 34. However, the capacitor 76 connected parallel to the load 20 can absorb the energy stored in the excited inductance of the inductor 32, thus suppressing the surge voltage on the excited inductance.

[0108] Since much of the energy remaining in the capacitor 76 thus connected is regenerated in the DC power supply unit 12, any reduction in the efficiency which is caused by the capacitor 76 is small.

[0109] The capacitor 76 connected parallel to the load 20 greatly affects the pulse duration of the pulsed output and the rise of the pulse voltage. Therefore, the capacitor 76 should have settings selected to match the specifications of the high-voltage pulse generating circuit 10H.

[0110] A high-voltage pulse generating circuit 10I according to a ninth embodiment of the present invention will be described below with reference to FIG. 14.

[0111] The high-voltage pulse generating circuit 10I according to the ninth embodiment is substantially the same as the high-voltage pulse generating circuit 10A (see FIG. 1) according to the first embodiment, but differs in that a resistor 78, rather than the diode 36, is connected between the gate terminal G of the first semiconductor switch 34 and the terminal 42 of the inductor 32.

[0112] When the power MOSFET 26 is turned on, the first semiconductor switch 34 can reliably be turned on. If the first semiconductor switch 34 is controlled based on current, then it is not turned on unless a current is introduced into the gate thereof. The resistor 78 connected as described above is effective in reliably turning on the first semiconductor switch 34.

[0113] Use of the resistor 78 makes the high-voltage pulse generating circuit 10I relatively low in cost even if the DC power supply unit 12 is constructed to produce a high power, supply voltage. Specifically, if the diode 36 is connected between the gate terminal G of the first semiconductor switch 34 and the terminal 42 of the inductor 32 and the DC power supply unit 12 is constructed to produce a high power supply voltage, then the diode 36 needs to comprise a plurality of series-connected diodes for an increased withstand voltage or a diode having a high withstand voltage, which is generally expensive. The resistor 78, however, is inexpensive and makes the high-voltage pulse generating circuit 10I lower in cost.

[0114] The high-voltage pulse generating circuits 10A through 10I according to the first through ninth embodiments are advantageous over the conventional high-

voltage pulse generating circuit 100 and the proposed high-voltage pulse generating circuit 118 in that only one first semiconductor switch 34 is required as a semiconductor switch to which a high voltage is applied, and a gate drive circuit, which is usually used in the form of an electronic circuit for energizing the gate of the first semiconductor switch 34, is not required.

[0115] The circuit components of the high-voltage pulse generating circuits 10A through 10I according to the first through ninth embodiments where a high voltage is generated or supplied, include only the anode terminal A of the first semiconductor switch 34 and the terminal 44 of the inductor 32. The other circuit components of the high-voltage pulse generating circuits 10A through 10I according to the first through ninth embodiments may be circuit components operated with low-voltage.

[0116] For example, if the high-voltage pulse generating circuit according to the present invention is used in an application for decomposing automobile exhaust gases with a plasma generated by a pulse discharge, then the high-voltage pulse generating circuit may be operated by a DC power supply having a power supply voltage of about 42 V, which may be an automobile battery, and the circuit components of the high-voltage pulse generating circuit may have a voltage rating up to several dozen V. The conventional high-voltage pulse generating circuit 100 shown in FIG. 15 needs the capacitor charger 102 as a DC power supply, which is usually very expensive.

[0117] The high-voltage pulse generating circuits 10A through 10I according to the first through ninth embodiments can suitably be employed in an apparatus which requires a pulse, having an extremely short rise time and a high voltage rise rate (dv/dt), such as a plasma generating apparatus for decomposing toxic gases.

Claims

1. A high-voltage pulse generating circuit comprising:
 - a DC power supply unit (12) having opposite terminals;
 - an inductor (32), a first semiconductor switch (34), and a second semiconductor switch (14) which are connected in series between the opposite terminals of said DC power supply unit (12); and
 - a diode (36) having a cathode terminal connected to a terminal of said inductor (32) which has another terminal connected to an anode terminal of said first semiconductor switch (34), and an anode terminal connected to a gate terminal of said first semiconductor switch (34).
2. A high-voltage pulse generating circuit according to claim 1, wherein said inductor (32) stores an induction energy when said first semiconductor switch (34) is rendered conductive by a turn-on of said second semiconductor switch (14), and generates a high-voltage pulse when said first semiconductor switch (34) is turned off by a turn-off of said second semiconductor switch (14).
3. A high-voltage pulse generating circuit according to claim 1, wherein said inductor (32) comprises:
 - a primary winding (33); and
 - a secondary winding (38) magnetically coupled to said primary winding (33).
4. A high-voltage pulse generating circuit according to claim 3, wherein said secondary winding (38) has a greater number of turns than said primary winding (33).
5. A high-voltage pulse generating circuit according to claim 1, wherein said inductor (32) comprises:
 - a primary winding (33); and
 - a secondary winding (38) connected to said primary winding (33) without insulating a DC signal.
6. A high-voltage pulse generating circuit according to claim 5, wherein said secondary winding (38) is connected in additive polarity to the primary winding (33).
7. A high-voltage pulse generating circuit according to claim 1, wherein said inductor (32) has a magnetizable core.
8. A high-voltage pulse generating circuit according to claim 1, wherein said first semiconductor switch (34) comprises a device controlled based on current when said first semiconductor switch (34) is turned off and controlled based on voltage when said first semiconductor switch (34) is turned on.
9. A high-voltage pulse generating circuit according to claim 1, wherein said first semiconductor switch (34) comprises a self-extinguishing or commutation-turn-off device.
10. A high-voltage pulse generating circuit according to claim 9, wherein said first semiconductor switch (34) comprises a static induction thyristor.
11. A high-voltage pulse generating circuit according to claim 1, wherein said second semiconductor switch (14) comprises a self-extinguishing or commutation-turn-off device.
12. A high-voltage pulse generating circuit according to

claim 11, wherein said second semiconductor switch (14) comprises a power metal-oxide semiconductor field-effect transistor.

13. A high-voltage pulse generating circuit according to claim 2, further comprising: 5

a circuit component connected to regenerate remaining energy in said inductor (32) in said DC power supply unit (12) after said second semiconductor switch (14) is turned off. 10

14. A high-voltage pulse generating circuit according to claim 13, wherein said circuit component comprises a diode (52) connected parallel to said first semiconductor switch (34) and having a cathode terminal connected to the anode terminal of said first semiconductor switch (34). 15

15. A high-voltage pulse generating circuit according to claim 13, wherein said circuit component comprises a diode (64) having an anode terminal connected between said DC power supply unit (12) and said second semiconductor switch (14) and a cathode terminal connected to said otherterminal of said inductor (32). 20 25

16. A high-voltage pulse generating circuit according to claim 2, further comprising: 30
- a path for commutating a current flowing through said first semiconductor switch (34) after said second semiconductor switch (14) is turned off. 35

17. A high-voltage pulse generating circuit according to claim 16, wherein said path is connected parallel to said first semiconductor switch (34).

18. A high-voltage pulse generating circuit according to claim 17, wherein said path has a capacitor (68) connected between the anode and cathode terminals of said first semiconductor switch (34). 40

19. A high-voltage pulse generating circuit according to claim 17, wherein said path has a capacitor (70) connected between the gate and anode terminals of said first semiconductor switch (34). 45

20. A high-voltage pulse generating circuit according to claim 1, further comprising: 50
- a load (20) connected to said inductor (32); and a capacitor (76) connected parallel to said load (20). 55

21. A high-voltage pulse generating circuit comprising:

a DC power supply unit (12) having opposite terminals;

an inductor (32), a first semiconductor switch (34), and a second semiconductor switch (14) which are connected in series between the opposite terminals of said DC power supply unit (12); and

a resistor (78) connected between a terminal of said inductor (32) which has another terminal connected to an anode terminal of said first semiconductor switch (34), and a gate terminal of said first semiconductor switch (34).

FIG. 1

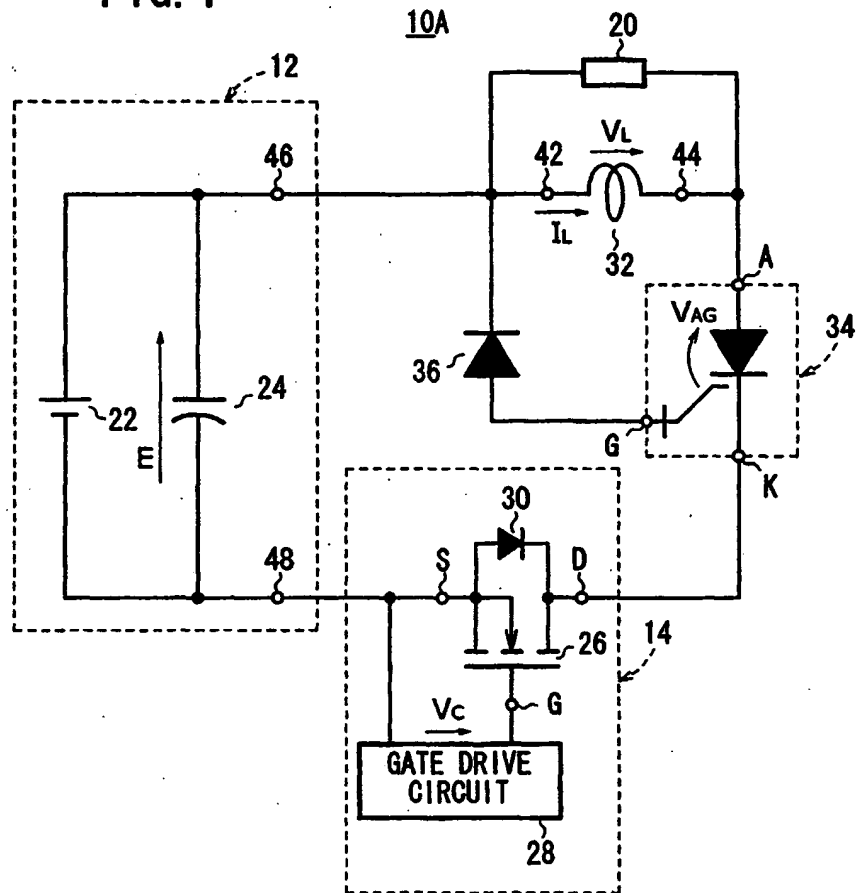


FIG. 2A

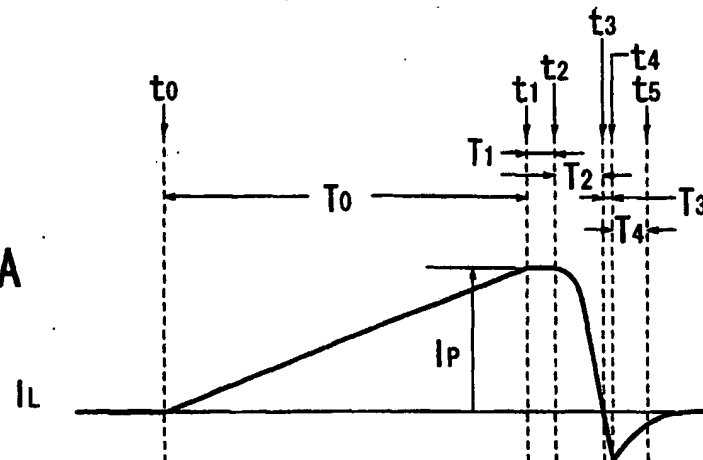


FIG. 2B

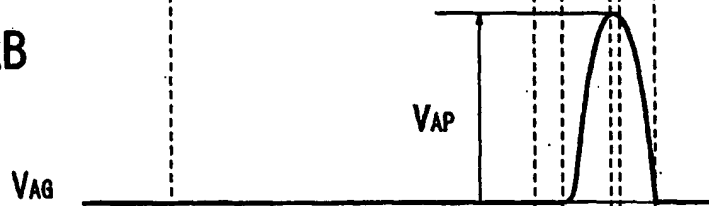


FIG. 2C

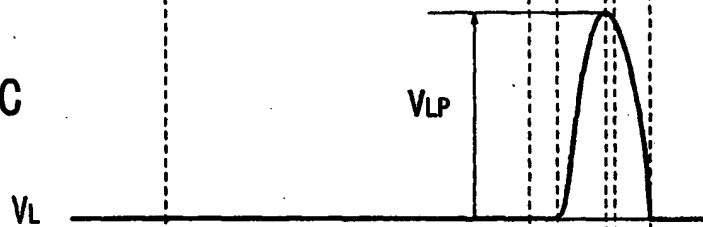


FIG. 2D

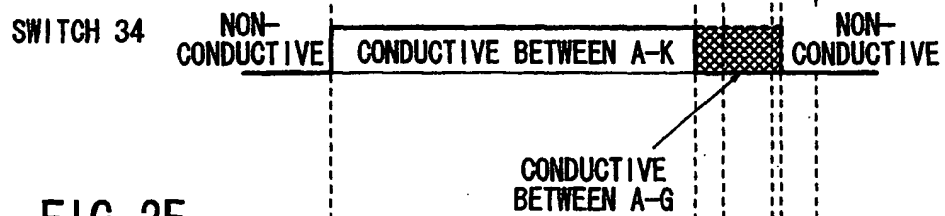


FIG. 2E



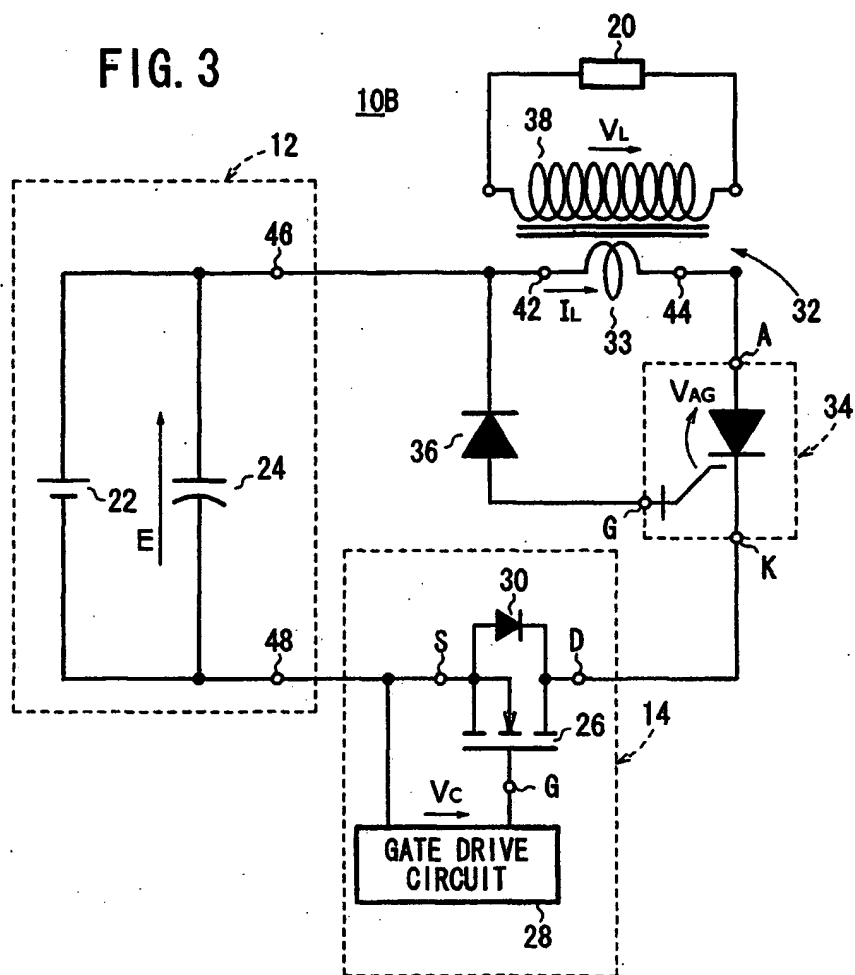
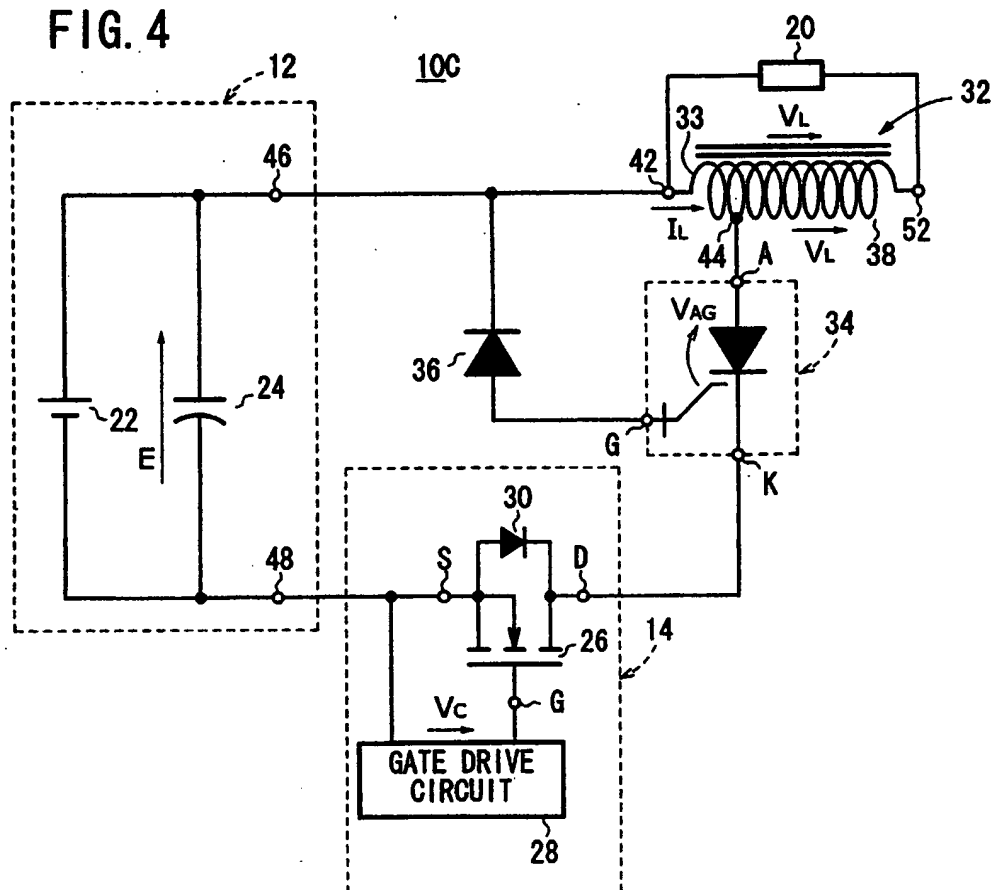
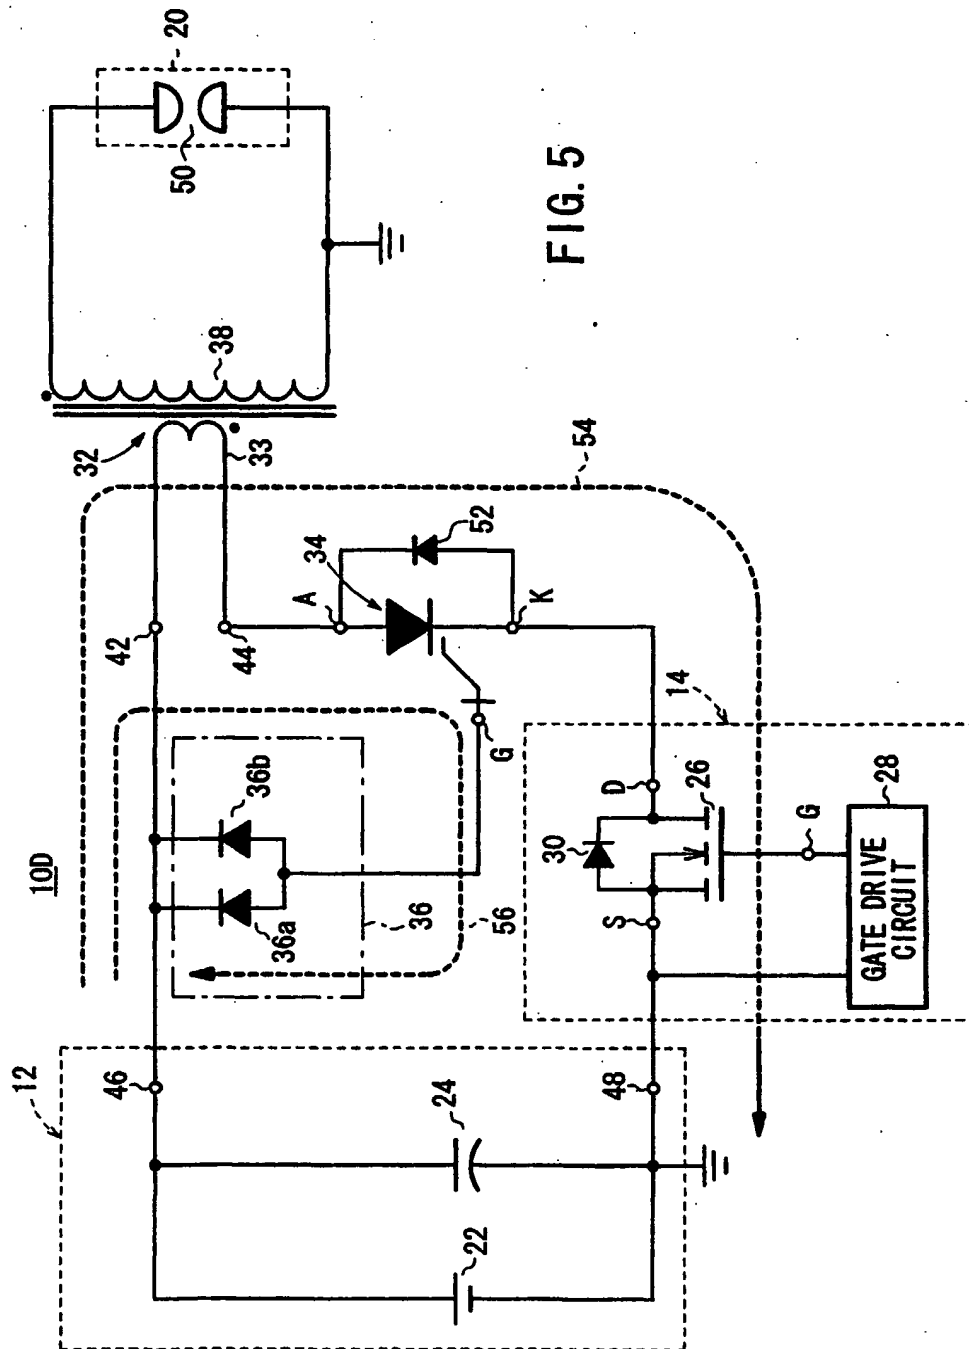


FIG. 4





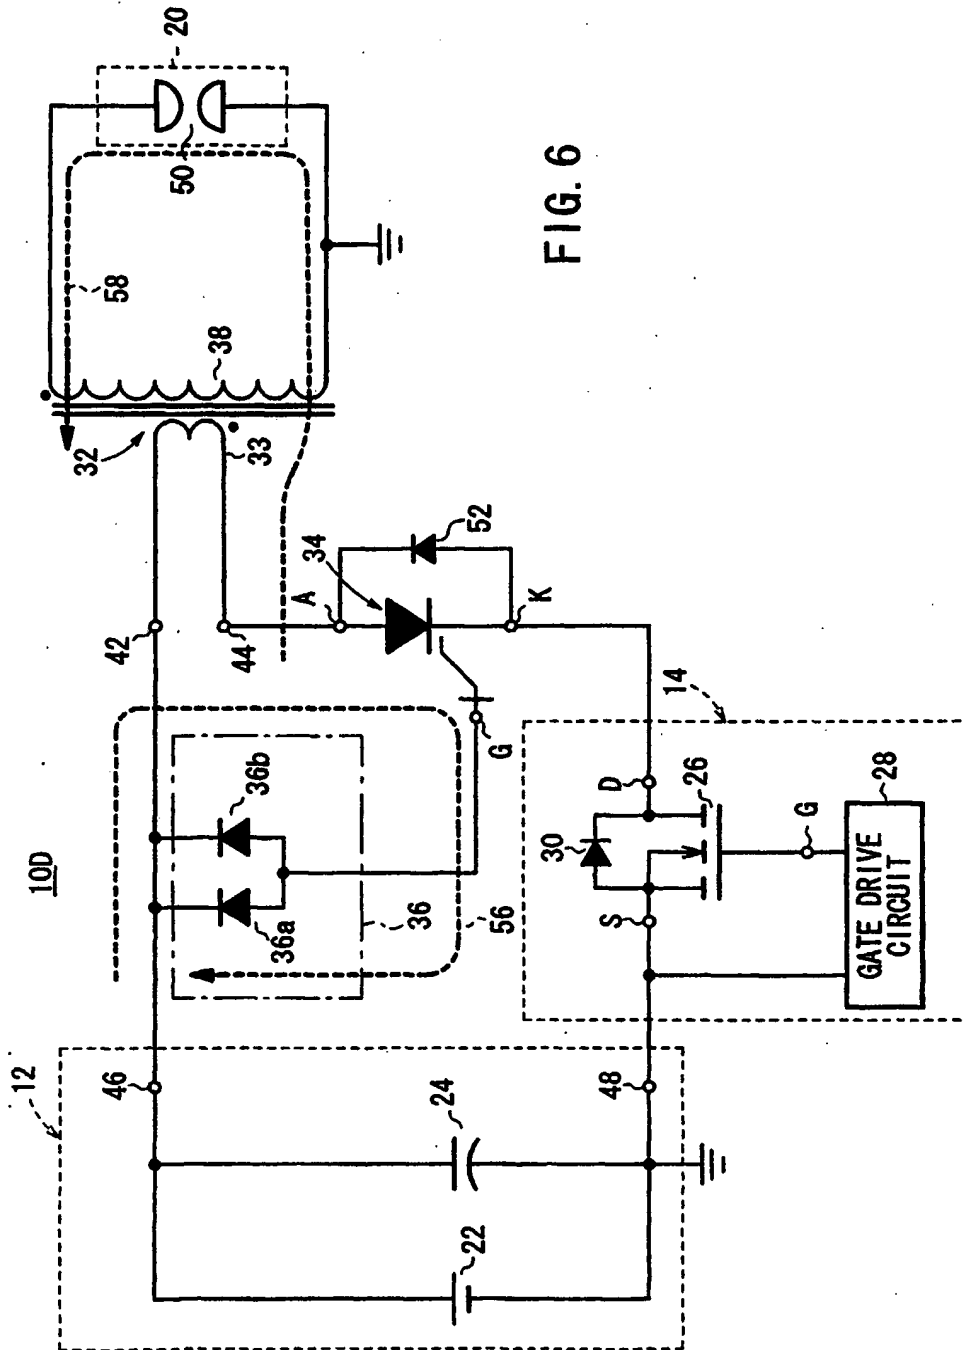
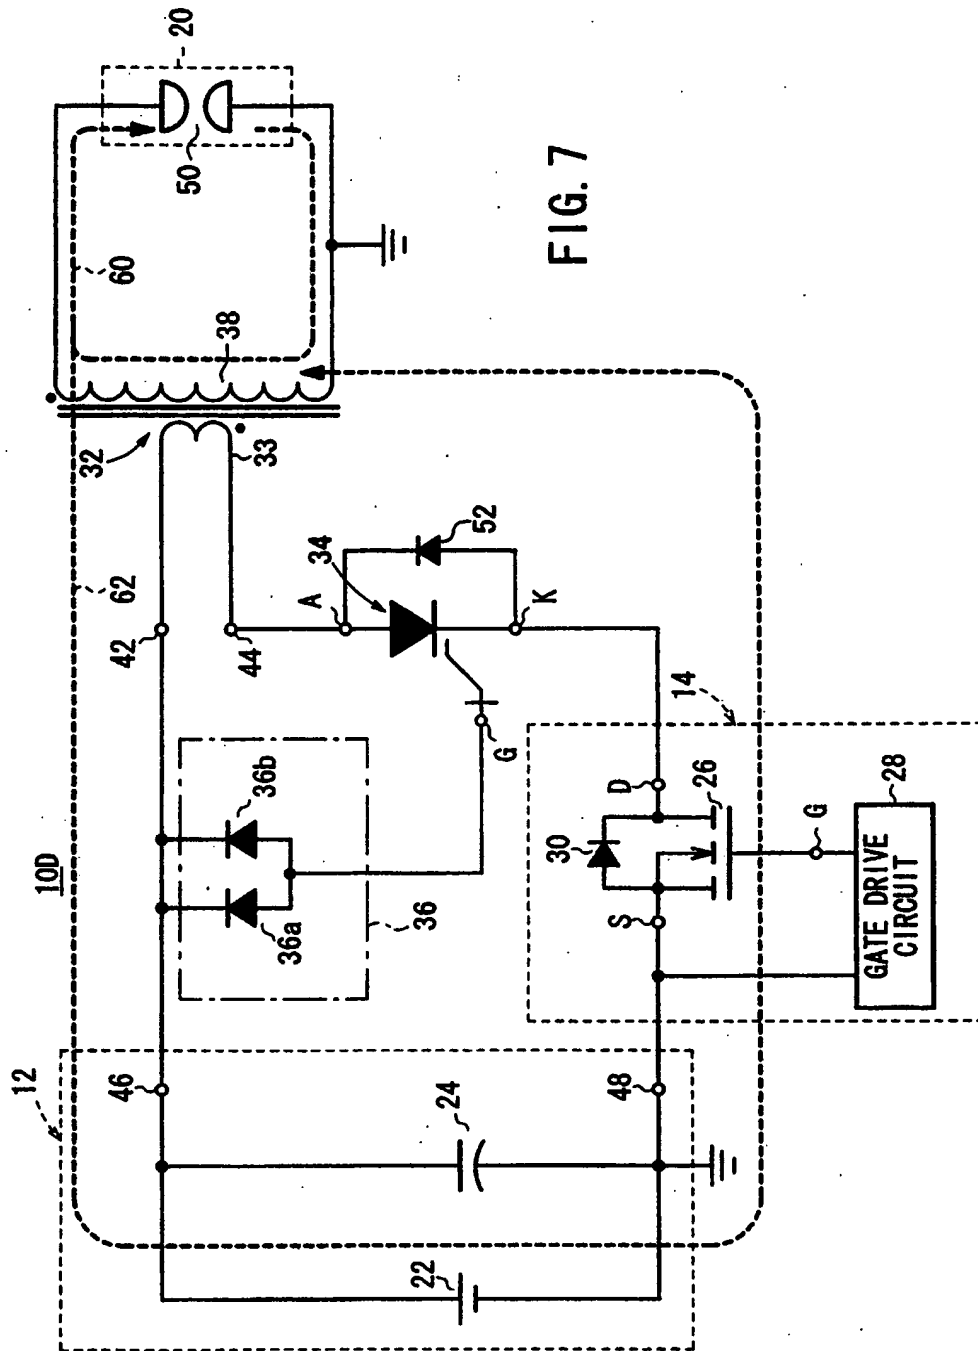
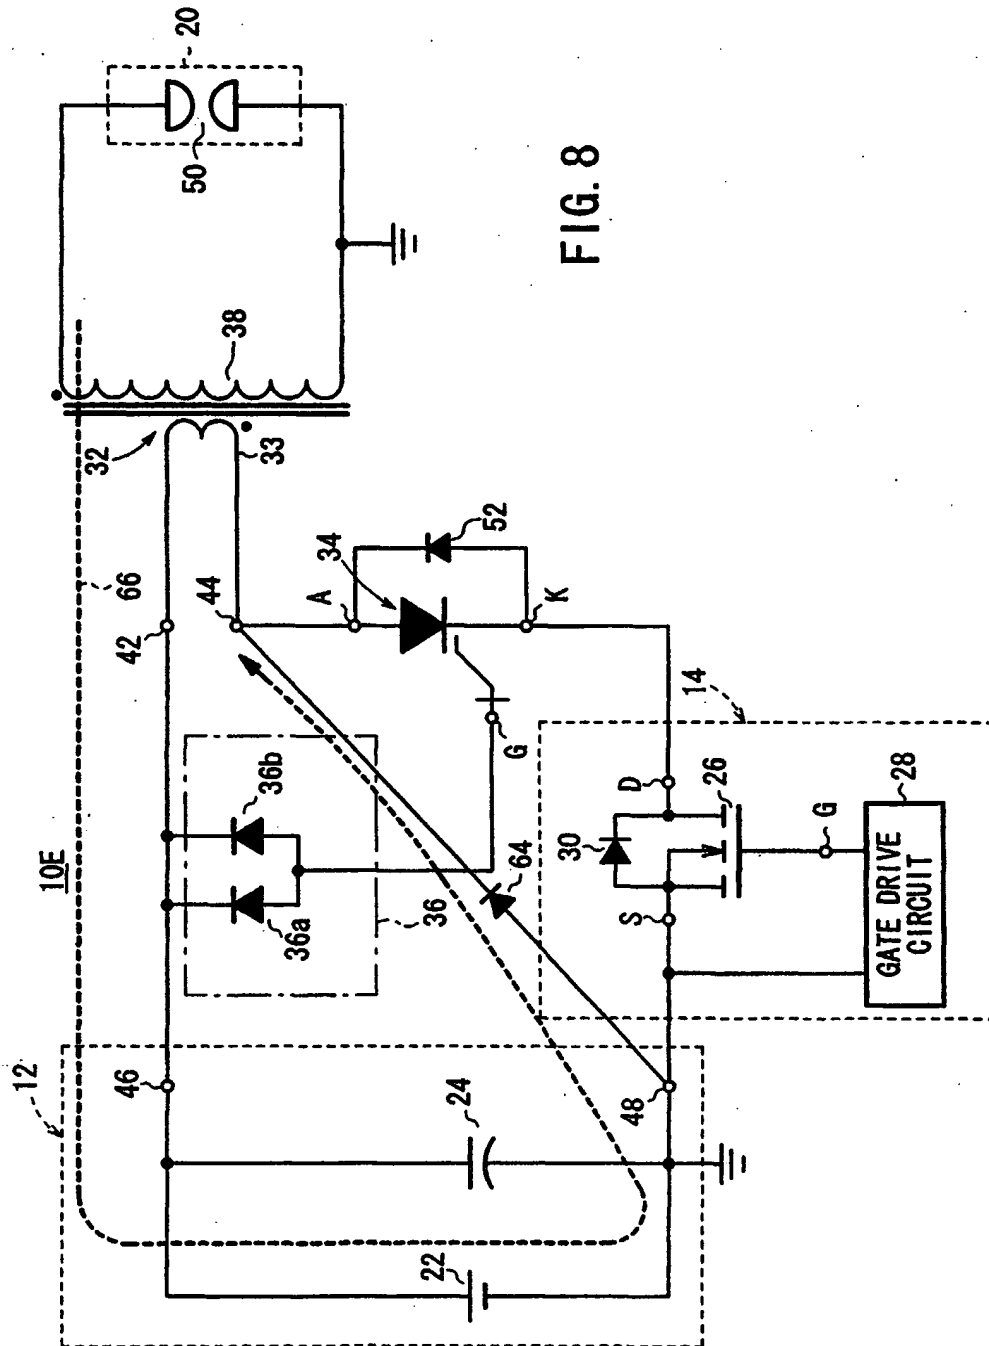


FIG. 6





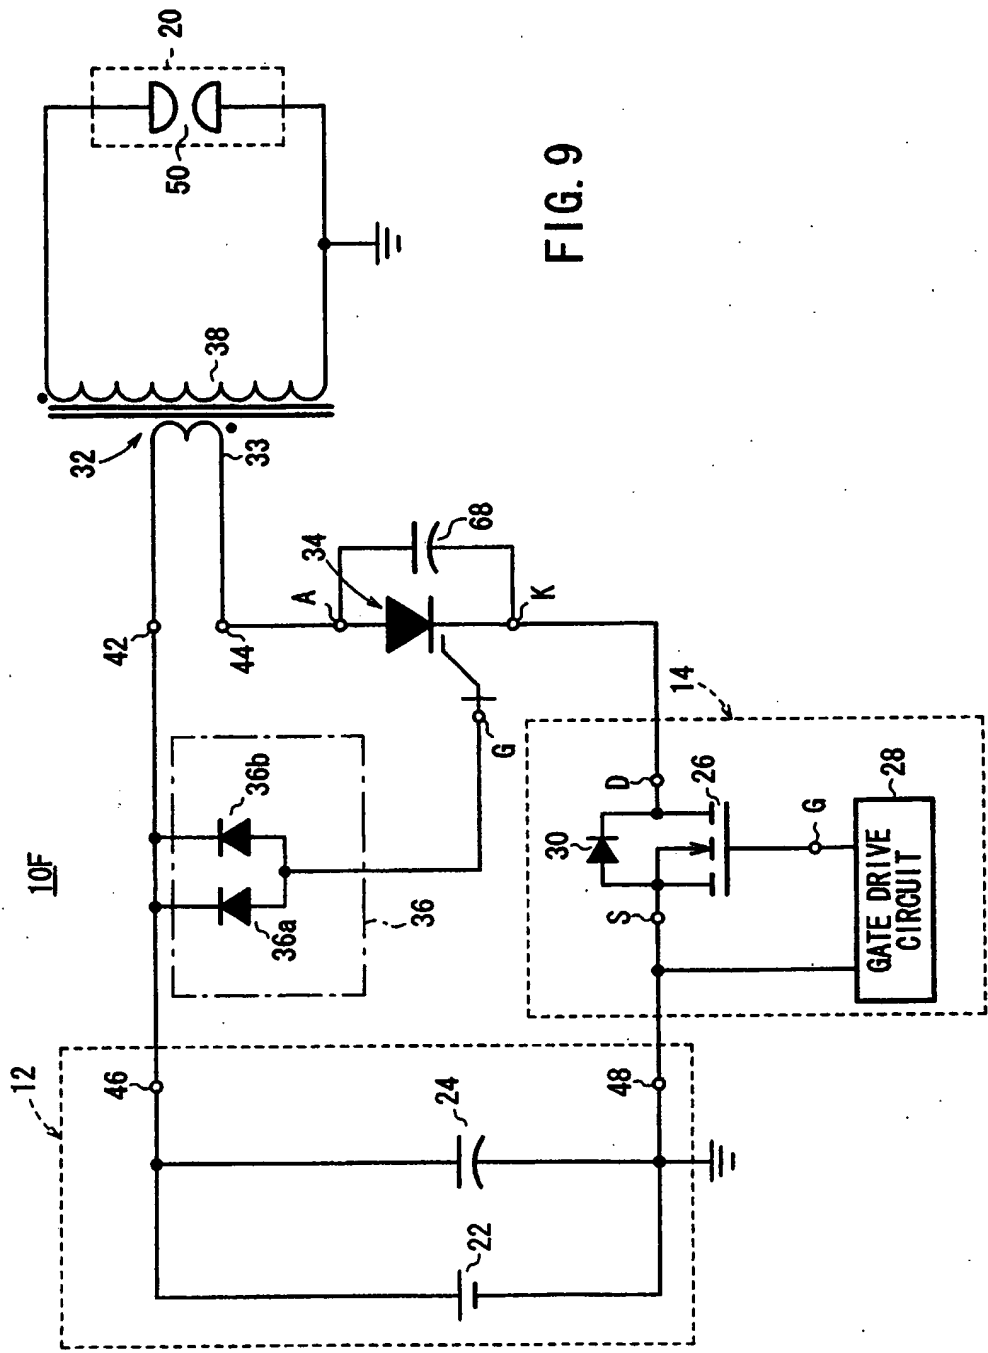


FIG. 9

FIG. 11

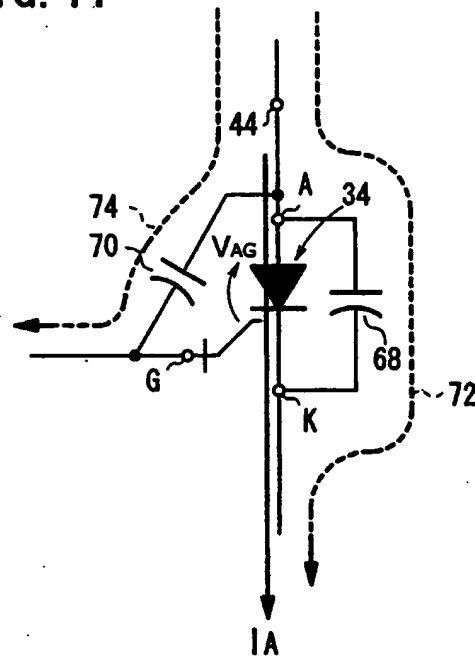


FIG. 12A

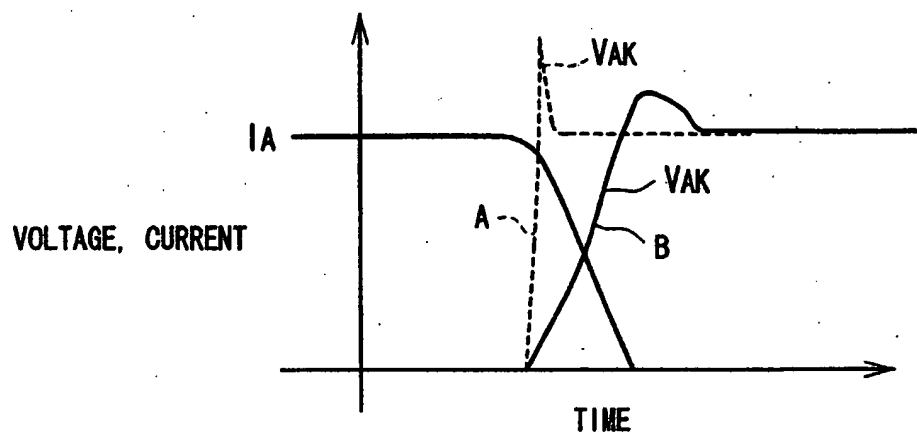
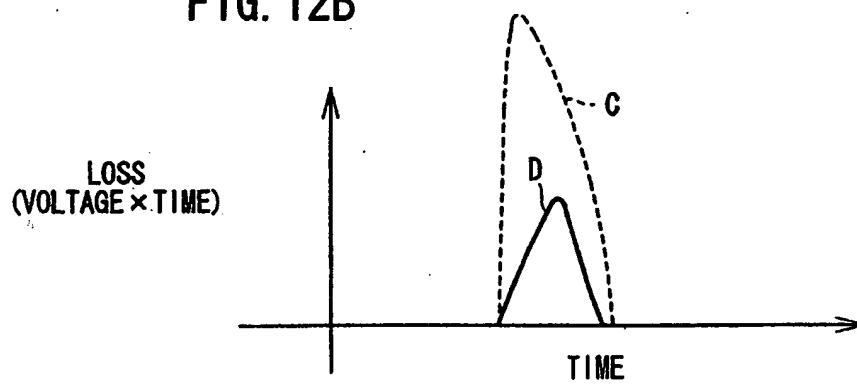


FIG. 12B



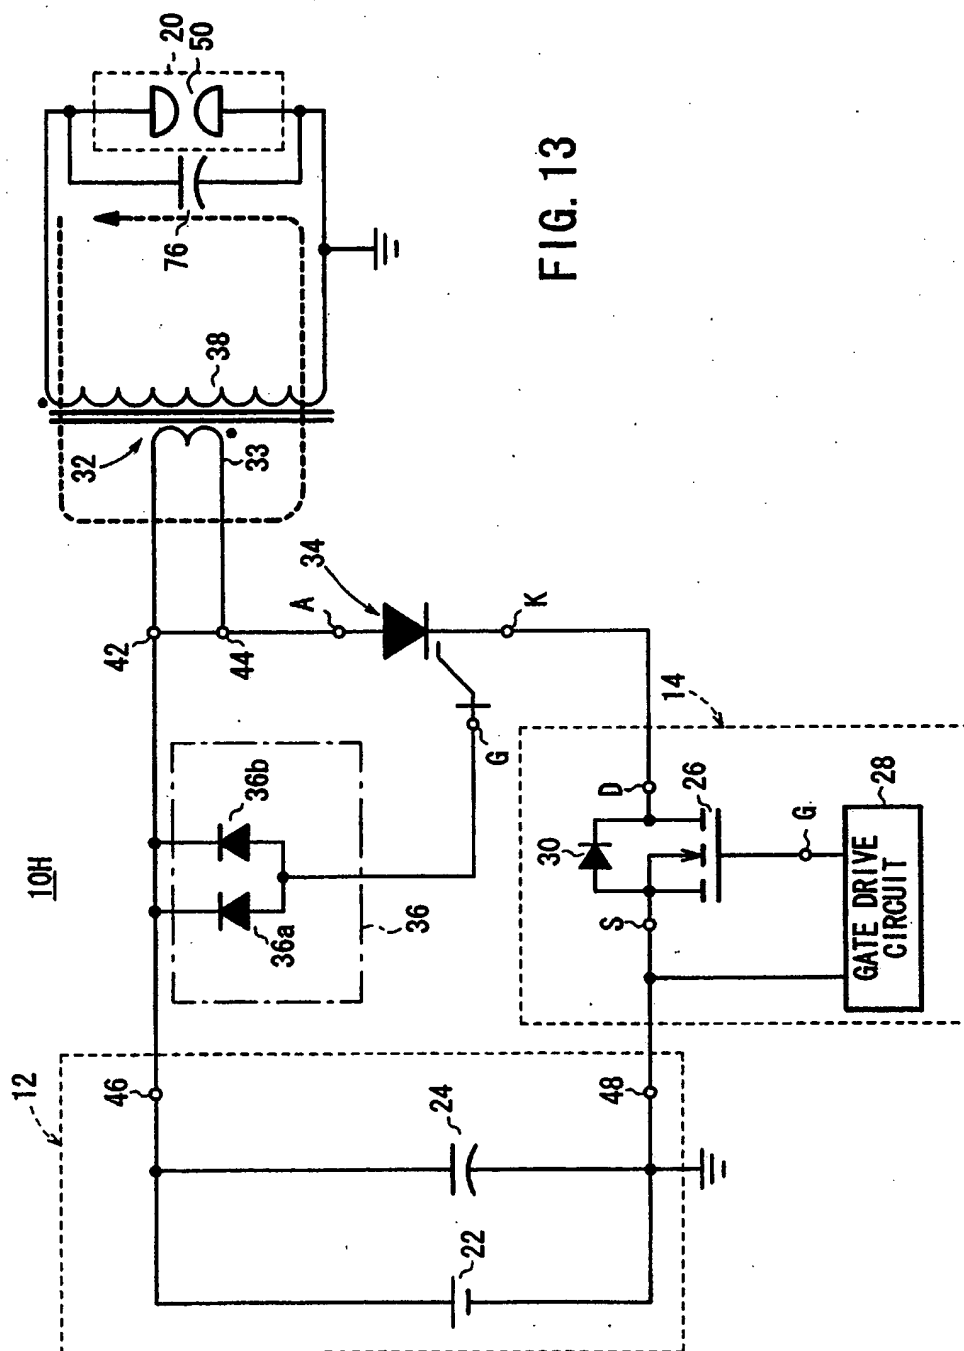


FIG. 13

FIG. 14

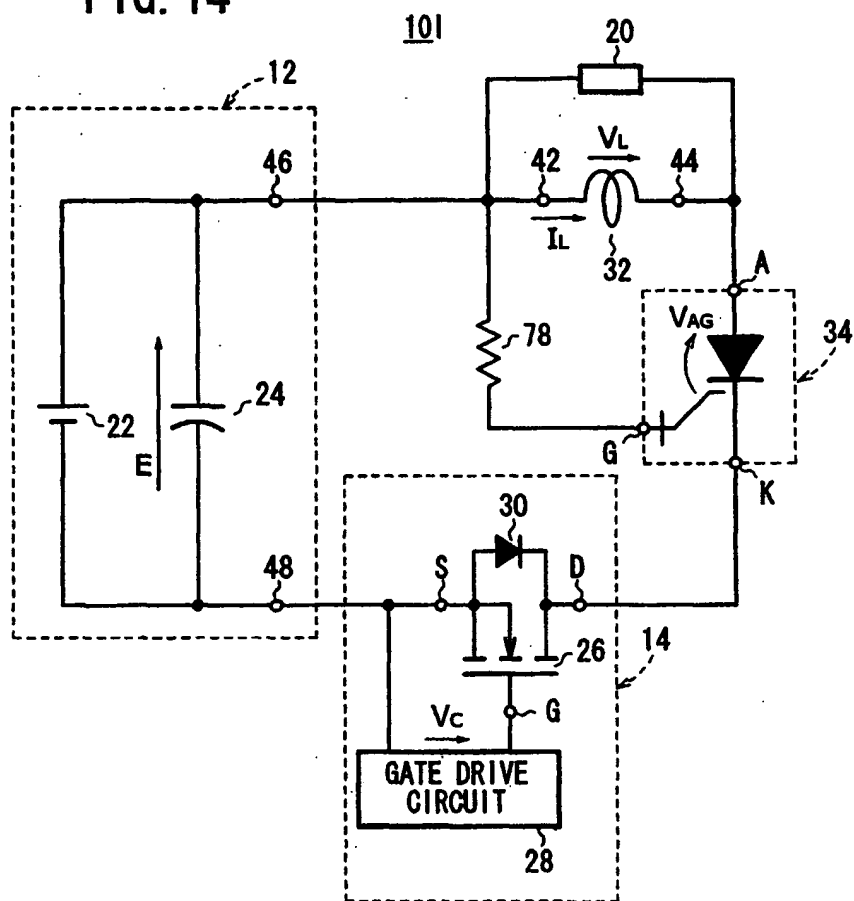


FIG. 15


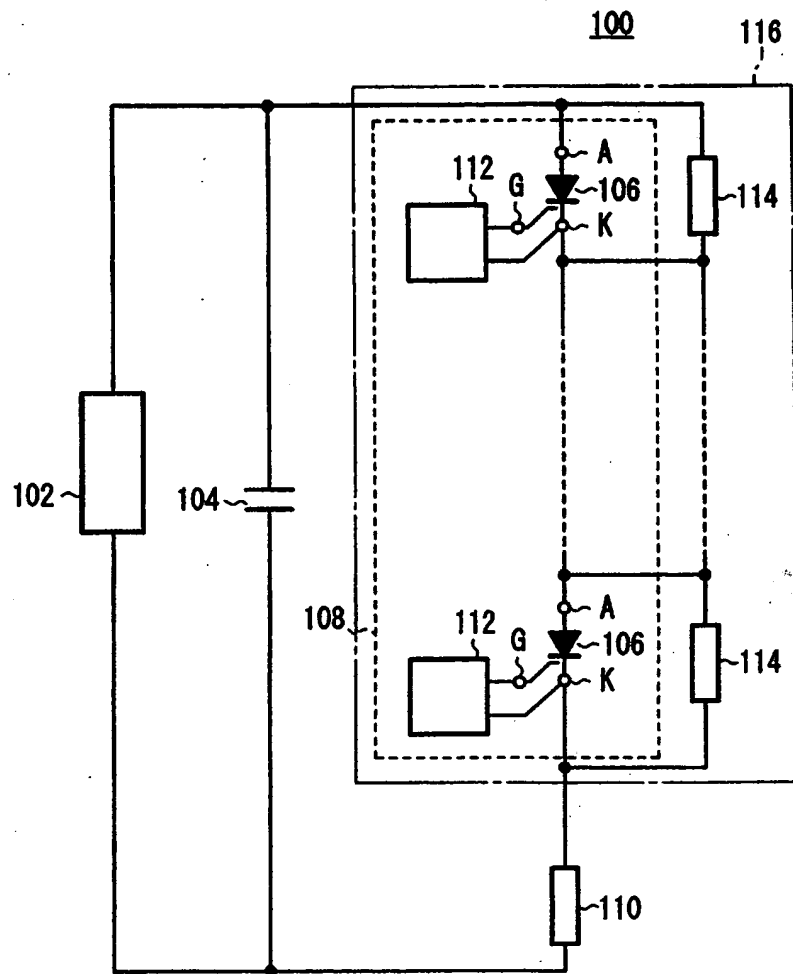


FIG. 16



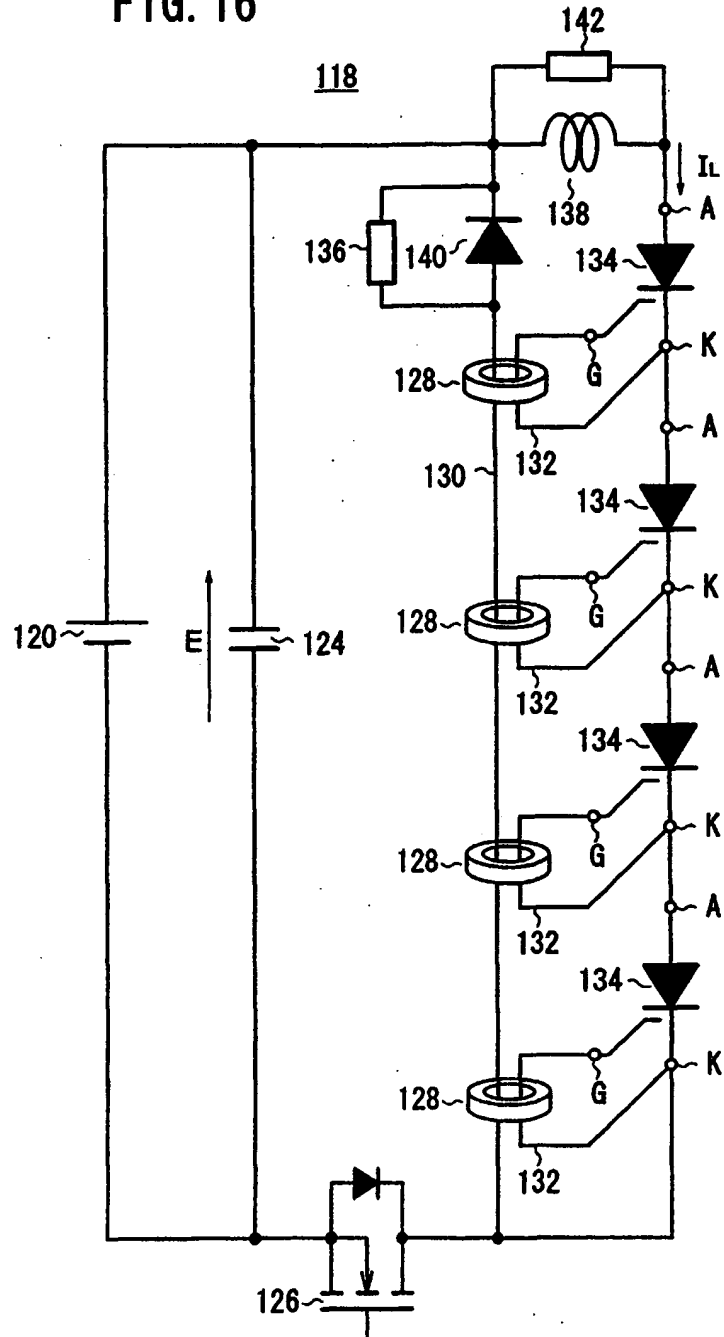

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
02.11.2005 Bulletin 2005/44

(51) Int Cl.7: **H03K 3/57**

(43) Date of publication A2:
02.01.2004 Bulletin 2004/01

(21) Application number: **03253708.6**

(22) Date of filing: **11.06.2003**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT RO SE SI SK TR
Designated Extension States:
AL LT LV MK

(30) Priority: **12.06.2002 JP 2002171684**
03.03.2003 JP 2003056308

(71) Applicant: **NGK INSULATORS, LTD.**
Nagoya-city, Aichi 467-8530 (JP)

(72) Inventors:
• **Hatano, Tatsuhiko,**
c/o I.P.D. NGK Insulators, Ltd.
Nagoya City, Aichi-ken, 467-8530 (JP)
• **Sakuma, Takeshi, c/o I.P.D. NGK Insulators, Ltd.**
Nagoya City, Aichi-ken, 467-8530 (JP)
• **Iida, Katsuji**
Atsugi City, Kanagawa Pref.243-0037 (JP)

(74) Representative: **Paget, Hugh Charles Edward et al**
Mewburn Ellis LLP
York House
23 Kingsway
London WC2B 6HP (GB)

(54) **High-voltage pulse generating circuit**

(57) A high-voltage pulse generating circuit (10A) has an inductor (32), a first semiconductor switch (34), and a second semiconductor switch (14) which are connected in series between opposite terminals of a DC power supply unit (12), and a diode (36) having a cathode terminal connected to a terminal (42) of the inductor (32) which has another terminal connected to an anode terminal (A) of the first semiconductor switch (34), and an anode terminal connected to a gate terminal of the

first semiconductor switch (34). The inductor (32) stores an induction energy when the first semiconductor switch (34) is rendered conductive by a turn-on of the second semiconductor switch (14), and generates a high-voltage pulse when the first semiconductor switch (34) is turned off by a turn-off of the second semiconductor switch (14).



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 03 25 3708

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 0 959 562 A (STMICROELECTRONICS S.R.L.) 24 November 1999 (1999-11-24) * paragraph [0021] - paragraph [0028]; figures 7-10 *	1,8,9, 11,12,21	H03K3/57
X	GB 2 105 927 A (THE * PLESSEY COMPANY LIMITED) 30 March 1983 (1983-03-30) * page 1, line 115 - page 2, line 45; figures 1-3 *	1,8,9, 11,12,21	
P,X	WEIHUA JIANG ET AL: "Compact, high repetition-rate pulsed power generator using high-speed Si-thyristor" CONFERENCE RECORD OF THE 25TH INTERNATIONAL POWER MODULATOR SYMPOSIUM AND 2002 HIGH-VOLTAGE WORKSHOP. HOLLYWOOD, CA, JUNE 30 - JULY 3, 2002, INTERNATIONAL POWER MODULATOR SYMPOSIUM, NEW YORK, NY : IEEE, US, 30 June 2002 (2002-06-30), pages 602-604, XP010636721 ISBN: 0-7803-7540-8 * the whole document *	1,2,5, 8-12	
P,X	YAMASHITA K ET AL: "High rep-rate inductive-energy-storage pulsed power modulator using high voltage static induction thyristor" CONFERENCE RECORD OF THE 25TH INTERNATIONAL POWER MODULATOR SYMPOSIUM AND 2002 HIGH-VOLTAGE WORKSHOP. HOLLYWOOD, CA, JUNE 30 - JULY 3, 2002, INTERNATIONAL POWER MODULATOR SYMPOSIUM, NEW YORK, NY : IEEE, US, 30 June 2002 (2002-06-30), pages 382-385, XP010636665 ISBN: 0-7803-7540-8 * the whole document *	1,2, 8-12, 16-18	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			H03K H01L
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 9 September 2005	Examiner Cantarelli, R
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

2
EPO FORM 1503 03.02 (P04001)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 03 25 3708

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	US 5 774 348 A (DRUCE ET AL) 30 June 1998 (1998-06-30) * column 3, line 3 - line 51; figure 1 * -----	1-21	
A	BOWLES E E ET AL: "30 KA, 5000 V SOLID STATE OPENING SWITCH FOR INDUCTIVE ENERGY STORES" PROCEEDINGS OF THE POWER MODULATOR SYMPOSIUM. MYRTLE BEACH, SOUTH CAROLINA, JUNE 23 - 25, 1992, NEW YORK, IEEE, US, vol. SYMP. 20, 23 June 1992 (1992-06-23), pages 249-253, XP000348411 ISBN: 0-7803-0718-6 * page 249, right-hand column, line R, last paragraph - page 251, left-hand column, line 24; figure 1 * -----	1-21	
A	US 4 740 722 A (FURUHATA ET AL) 26 April 1988 (1988-04-26) * column 3, line 65 - column 4, line 68; figures 1A,1B * -----	1,21	
A	US 5 151 762 A (UENISHI ET AL) 29 September 1992 (1992-09-29) * column 14, line 11 - column 15, line 35; figures 21,22 * -----	1,21	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
Place of search The Hague		Date of completion of the search 9 September 2005	Examiner Cantarelli, R
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

2
EPO FORM 1503 03.92 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 03 25 3708

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

09-09-2005

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
EP 0959562	A	24-11-1999	EP	0959562 A1	24-11-1999
			US	6255890 B1	03-07-2001

GB 2105927	A	30-03-1983	NONE		

US 5774348	A	30-06-1998	NONE		

US 4740722	A	26-04-1988	JP	62159515 A	15-07-1987
			DE	3700071 A1	09-07-1987
			FR	2592750 A1	10-07-1987

US 5151762	A	29-09-1992	JP	2579378 B2	05-02-1997
			JP	4027164 A	30-01-1992
			JP	4171768 A	18-06-1992
			DE	4112084 A1	17-10-1991
			DE	4143377 C2	02-07-1998
			KR	9408259 B1	09-09-1994
			US	5443999 A	22-08-1995
			US	5379089 A	03-01-1995
			KR	9411477 B1	19-12-1994

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82